



Biological Safety Cabinet

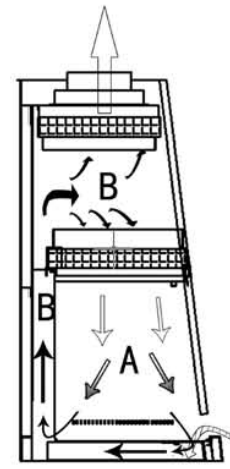

INBSC110A2
INBSC130A2

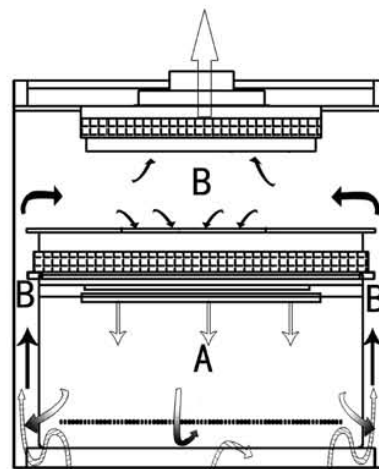

- Room Air
- Contaminated Air
- Air through HEPA
- A Protected Zone
- B Inprotected Zone



| Model | INBSC070A2 | INBSC110A2 | INBSC130A2 | INBSC150A2 | INBSC180A2 |
|----------------------|---|-------------------|---------------|---------------|---------------|
| Internal size(mm) | 600×400×580 | 900×600×660 | 1100×600×660 | 1300×600×660 | 1600×600×660 |
| External size(mm) | 700×500×1200 | 1100×850×2200 | 1300×850×2200 | 1500×850×2265 | 1800×850×2300 |
| Tested Opening | 200 mm | | | | |
| Working Opening | 400 mm | | | | |
| Inflow Velocity | 0.53 m/s | | | | |
| Down Flow Velocity | 0.33 m/s | | | | |
| Filter | Two HEPA filter 99.999% efficient(0.3 microns) | | | | |
| Blower | 1 | 2 | 2 | 1 | 1 |
| Front Window | Two-layer toughened glass >5mm | | | | |
| Noise | ≤65 dB | | | | |
| UV lamp | 15W×1 | 20W×1 | 20W×1 | 30W×1 | 30W×1 |
| Fluorescent Lamp | 40W×1 | 21W×1 | 21W×1 | 28W×2 | 28W×2 |
| Lighting (Lux) | 680 | 800 | 800 | 800 | 800 |
| Power(W) | 800 | 1200 | 1200 | 1200 | 1500 |
| Water and Gas Tap | 0 | | Water Tap:1 | Gas Tap: 1 | |
| Waterproof Socket | | | 2 | | |
| Display | LED display | VFD display | | | |
| Control System | | Microprocessor | | | |
| Airflow System: | 70% air recirculation, 30% air exhaust | | | | |
| Material | Work zone interior is made of 304 stainless steel Body: Epoxy coated cold rolled steel | | | | |
| Base (optional) | Height:635mm | | | | |
| Caster Wheel | Universal Wheel | Directional wheel | | | |
| Clean Level | 100 | | | | |
| Electrical Parameter | 110-240V/50-60Hz (optional) | | | | |



Certification Test



NSF



NSF



ISO 14001



ISO 13485



ISO 9001

